



MADE TOUGH FOR KIWI CONDITIONS

**AGM deep cyclic battery suitable
for RV's, 4WD, caravans and marine**



FEATURES

- Sealed maintenance free AGM technology
- State of the art plate design to meet New Zealand conditions
- Flame retardant V0 case (excludes UL-230 model)
- Dual terminals for multiple connection
- 12 month under-bonnet warranty*

Ultimate Xtreme is manufactured for MPower

*Excludes certain applications

mpower

www.mpower.co.nz
sales@mpowergroup.co.nz
Auckland: +61 9415 6615
Christchurch: +61 274 742 753
Wellington: +64 4232 5188



BATTERY RANGE

Battery Model	Dimensions (mm) and Weight (Kg)				Cold Cranking Amps			Volts	Reserve Capacity - Minutes Discharged					Capacity - Ampere Hour						
	Length	Width	Height	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)		75 Amps	25 Amps	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	20 Hr	10 Hr	5 Hr	3 Hr	1 Hr
UL-60-VO	229	138	213	18.6	597	466	309	12	20	88	123	172	360	62	59	54	50	44	41	34
UL-80-VO	260	168	211	25.5	800	664	483	12	34	148	200	277	574	93	88	82	75	68	62	51
UL-110-VO-27	306	168	211	29.5	861	751	546	12	46	178	236	332	689	126	118	110	90	80	74	61
UL-120-VO-31	329	173	209	32.8	925	804	577	12	50	193	259	372	769	135	129	120	98	88	81	66
UL-230*	521	270	205	70.2	1173	1057	987	12	171	541	695	938	1998	289	271	251	230	204	189	155.4


*This model is not part of the Xtreme range and is not suitable for under-bonnet applications

Advantages of AGM batteries:

- Multipurpose battery, ideal for starting, deep cycle and standby applications
- High charge and discharge rate
- Totally maintenance-free
- Spill proof/ leak proof
- Installs upright or on side
- More economical than gel cell batteries
- Cabin safe - very low to no gassing
- Superior for shorter duration/higher discharges
- Vibration resistant - heavy duty, long lasting



Battery Cycle Life VS DOD Ultimate Xtreme

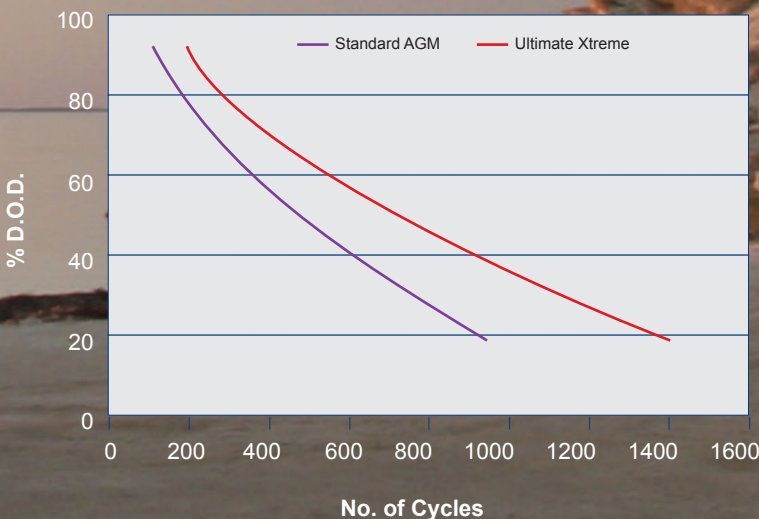

www.mpower.co.nz
sales@mpowergroup.co.nz
 Auckland: +61 9415 6615
 Christchurch: +61 274 742 753
 Wellington: +64 4232 5188